



Hybrid Nano Fluid Slip Flow Over a Permeable Sheet with Radiative Heat Flux, Variable Thermal Conductivity and Heat Source

A. Ahmed ^{a*}, S. Muhammad ^a and M. A. T. Ucheri ^a

^a Department of Mathematics, Kebbi State Polytechnic, Dakingari Kebbi State, Nigeria.

Authors' contributions

This work was carried out in collaboration among all authors. All authors read and approved the final manuscript.

Article Information

DOI: <https://doi.org/10.9734/psij/2024/v28i4840>

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/118682>

Original Research Article

Received: 13/04/2024

Accepted: 15/06/2024

Published: 20/06/2024

ABSTRACT

Purpose: This aims to investigate heat and mass transfer characteristics of hybrid Nano fluid slip flow over a permeable sheet with radiative heat flux, variable thermal conductivity and heat source.

Methodology: Formulated Mathematical equations are transformed into self-similar equations using similarity transformation. Boundary value problem solver in MATLAB was used to solve the system of reduced similarity equations. In this study thorough examination was made on flow and heat transfer properties for various values of variable thermal conductivity parameter, thermal radiation and heat source. Validation of the present results with published results are in excellent agreement.

Findings: It is noticed that increase in radiative parameter attracts increase in temperature of the fluid at the shrinking region. It indicates that on shrinking region heat absorption take place with increase in value of variable thermal conductivity parameter (ϵ). The velocity of the fluid is

*Corresponding author: E-mail: abdahmej@gmail.com;

appreciated with increase in silver volume fraction (ϕ_2) and depreciates with increase in velocity slip parameter (P). Increase in velocity slip parameter decreases the local skin friction (P) and local Nusselt number is appreciated by increasing radiation parameter (R). Heat absorption is noticed with increase in variable thermal conductivity, silver volume fraction (ϕ_2) and heat source/sink parameter (Q).

Practical implication: In practice the investigation of effects of hybrid nanofluid flow over a permeable sheet with radiative heat flux, variable thermal conductivity and heat source have real-life and industrial applications, for example manufacturing, cooling electrical devices, biomedical, military etc.

Keywords: Variable thermal conductivity; radiative heat flux; heat source; slip condition.

NOMENCLATURE

u, v	: Velocity in x and y Directions Respectively.	Nu_x	: Local Nusselt Number
u_w	: Surface velocity.	Re_x	: Local Renold's Number
v_w	: Wall Mass Transfer Velocity.	t	: Time
L	: Characteristics Length	τ	: Dimensionless Time Variable
T	: Fluid Temperature	Ω	: Eigenvalue
T_w	: Temperature of the Fluid at the Wall		
T_∞	: Temperature of the Fluid Away from the Wall		
γ	: Heat Generation Parameter		
λ	: Stretching/Shrinking Parameter		
P_1	: Velocity Slip Factor		
Q_1	: Thermal Slip Factor		
ρ_f	: Fluid Density		
ρ_{hnf}	: Hybrid Nanofluid Density		
$(\rho C_p)_f$: Fluid Heat Capacity		
$(\rho C_p)_{hnf}$: Hybrid Nanofluid Heat Capacity		
μ_f	: Fluid Dynamics Viscosity		
μ_{hnf}	: Hybrid Nanofluid Dynamics Viscosity		
k_f	: Fluid Thermal Conductivity		
k_{hnf}	: Hybrid Nanofluid Thermal Conductivity		
f	: Dimensionless Velocity		
θ	: Dimensionless Temperature		
Pr	: Prandlt Number		
q	: Heat Generation Rate Constant		
P	: Dimensionless Velocity Slip Parameter		
Q	: Dimensionless Thermal Slip Parameter		
ϕ_{s1}, ϕ_{s2}	: Nanoparticles Volume Fraction for Aluminium and Silver Respectively		
ε	: Variable Thermal Conductivity Parameter		
S	: Wall mass transfer parameter		
C_f	: Local Skin Friction Coefficient		

1. INTRODUCTION

Effects of thermal conductivity in the studies of heat and mass transfer attracted attention of many researchers around the globe. Increase in its expansion and applicability has resulted to the advent of nano-fluid which play important role in thermal conductivity and resulted in in-depth analysis on thermal management of electronic devices. Its application in the area of cooling engines as coolant and electronics does not come with surprise since metallic substances (nano particles) conduct heat more than ordinary liquid (base fluid).

“Relevant literature on nanofluid and hybrid nanofluid were reviewed. Nanofluid flow has become area of interest for many researchers globally. Researches conducted were either experimental or theoretical studies and in most cases the two results found to be in agreement.

Measurement of local heat transfer coefficient along the tube in laminar flow of nanofluids, was conducted by Wen and Ding” [1]. It was discovered that the increase in heat transfer coefficient is greatest at the entry length region and enhancement increases with particles concentration. Roy et al. [2], studied “heat transfer and fluid flow of nanofluids in laminar radial flow cooling system. In their research established the importance of nanofluid as interesting alternative to conventional coolants”. Devi and Andrews [3] investigated “laminar boundary flow of nanofluid over a flat plate”.

“Analytical solution of natural convection flow of a nanofluid over a linearly stretching sheet in the presence of magnetic field, was presented by Hamad” [4]. Maripala and Kishan [5,6,7,8,9], studied “MHD nanofluid radiating stretching sheet with chemical reaction and heat source/sink. It was observed that when the strength of the magnetic field increase the velocity gradient at the interface has been diminishes, the temperature profiles increases with the increase in magnetic field parameter”. Aly and Pop [10], studied “MHD flow and heat transfer over a permeable Stretching /shrinking sheet in a hybrid nanofluid with a convective boundary condition It was concluded that the hybrid nanofluid causes more reduction in temperature profile unlike the mono nanofluid when the magnetic field, suction and copper volume fraction parameters are amplified”. Dual solution and stability analysis of a hybrid nanofluid over a stretching/shrinking sheet executing MHD flow, was investigated by Lund et al. [11]. Zainal et al. [12] investigated “stability analysis of MHD hybrid nanofluid flow over a stretching/shrinking sheet with quadratic velocity”. Xuan and Roeszil [13], examined “the Conceptions for heat transfer correlation of nanofluids and found out that thermal dispersion which takes place due to random movement of particles takes a major role in increasing heat transfer rate between the fluid and the wall”. Huang and Yih [14] presented “Non-linear radiation and variable viscosity effects on free convection of a power-law nanofluid over a truncated cone in porous medium with zero nanoparticles flux and internal heat generation”. Wahid et al. [15] demonstrated “hybrid nanofluid slip flow over an exponentially stretching/shrinking permeable sheet with heat generation. It was observed that an increase in the values of porosity and heat generation parameter resulted in increase in the thermal conductivity of the nanofluid”. “Thermal energy transport of radioactive nanofluid flow submerged with microorganism with zero mass flux condition was analysed” by Gangadha et al. [16]. Iyahrja et al. [17] analysed “on investigation on silver-water nanofluid for development of new viscosity correlation”. Rajesh and Sheremet [18] presented “natural convection on ternary hybrid nanofluid in a differential heated enclosure with non-uniform heating wall”. Comprehensive review of nanofluid heat transfer in porous medium, was revealed by Nabwey et al. [19], other related study is Rahaman et al. [20].

Petal et al. [21], elucidated “a micro-convection model for thermal conductivity of nanofluids”. “Impacts of variable thermal conductivity and mixed convective stagnation-point flow in a couple stress nanofluid with viscous heating and heat source”, was investigated by Gajjela and Garvandha [22]. “MHD flow and heat transfer of hybrid nanofluid over an exponentially shrinking surface with heat source/sink was lamented” by Othman et al. [23]. “Numerical simulation of variable thermal conductivity on 3D flow of nanofluid over a stretching sheet was explored” by Tarakaramu et al. [24], System of equations were solved numerically by Runge-Kutta-Fehlberg scheme along with well-known shooting technique The results revealed that the temperature and velocity of the fluid rise with increasing values of variable thermal conductivity parameter. Also, the temperature and normal velocity of the fluid in case of Cu-water nanoparticles is more than that of Al_2O_3 - water nanofluid. Abbas et al. [25] studied “numerical analysis of MHD nanofluid flow characteristics with heat and mass transfer over a vertical cone subjected to thermal radiations and chemical reaction. Khan and Malik studied forced convective heat transfer to sisco nanofluid past a stretching cylinder in the presence of variable thermal conductivity”.

“The effects of slip boundary condition on the flow of fluid in a channel, was studied by Rao and Rajagopal” [26]. Mukhopadyau [27], presented “slip effects of MHD boundary layer flow over an exponentially stretching sheet with suction/blowing and thermal radiation”. “MHD slip flow on Newtonian fluid past a stretching sheet with thermal convective boundary condition, radiation and chemical reaction, was examined” by Reda and Abdel Rahman [28]. Sher Akbar et al. [29], presented “radiation effect on MHD stagnation point flow of nanofluid towards stretching surface with convective boundary condition”. “Buoyancy effect on MHD flow of nanofluid over a stretching sheet in the presence of thermal radiation was explored” by Rashid et al. [30]. Hayat et al. [31] demonstrated “MHD three dimensional flow of nanofluid with velocity slip and non-linear thermal radiation”. Daniel, [32] analysed “presence of heat generation/absorption on boundary layer slip flow of nanofluid over a porous stretching sheet”. “Thermal radiation effects on the nanofluid buoyancy flow and heat transfer over a stretching sheet considering Brownian motion was forwarded” by Doganchi and Ganji [33]. Yashkun et al. [34] elaborated “MHD hybrid nanofluid flow

over a permeable stretching/shrinking sheet with thermal radiation effects". "MHD flow and heat transfer of a hybrid nanofluid past a nonlinear surface stretching/shrinking with effects of thermal radiation and suction was modelled" by Jaafar et al. [35]. Vishalakshi et al. [36] explored "MHD hybrid nanofluid flow over a stretching/shrinking sheet with skin friction: effects of radiation and mass transpiration".

"Effects of slip condition and Newtonian heating on MHD flow Casson fluid over a non-linearly stretching sheet saturated in a porous medium, was analysed" by Imran et al. [37]. Arabpour et al. [38] considered "investigation into the effects of slip boundary condition on nanofluid flow in a double layer microchannel". "Significance of thermal slip and convective boundary conditions in three dimension rotating Darcy-Forchheimer nanofluid flow was elucidated" by Shafiq et al. [39] Ahmed and Sarki [40], examined "slip condition effects on unsteady MHD fluid flow with radiative heat flux over a porous medium. The result indicated that flow of fluid with higher magnetic flux can be enhanced in slip regime". "Dual solution and stability analysis of Cu-H₂O-Casson nanofluid convection past a heated stretching/shrinking slippery sheet in a porous medium, was examined" by Duguma et al. [41].

Motivated by the above cited literature, the aim is to carefully study the characteristics flow pattern of hybrid nanofluid slip flow over a permeable sheet with radiative heat flux, variable thermal conductivity and heat source. This serves as extension of work of Wahid et al. [15] to include radiative heat flux and variable thermal

conductivity. It may be possible to have dual solutions in the work due to nature of stretching/shrinking surface. To determine physically reliable and stable solutions the stability analysis was carried out and numerical solution of the coefficient of skin friction and rate of heat transfer are presented graphically and the results are discussed.

2. MATHEMATICAL DESCRIPTION OF THE PROBLEM

A steady boundary layer of hybrid nanofluid slip flow induced by permeable stretching/shrinking sheet with radiation heat flux and heat generation is formed. We consider that the variable thermal conductivity k_{hnf} is assumed to be of the form given by Taghreed and Mahdy [42], $k_{hnf} = k_0 \{1 + m^* (T - T_\infty)\}$, where k_0 and k_{hnf} are the thermal conductivities at temperatures at the wall of the sheet and ambient fluid respectively and m^* is the constant depending of the nature of the fluid. According to the physical model in Fig. 1, u and v are velocity in x and y directions respectively. The surface velocity is given as $u_w(x) = ce^{x/L}$ and the wall mass transfer velocity is specified as $v_w(x) = v_0 e^{x/2L}$ $\lambda \geq 0$ is the stretching constant

$\lambda = 0$ refer to motionless sheet, T is the temperature, $T_w = T_\infty + T_0 e^{x/2L}$ is the sheet varying temperature with constant, T_0 and $q = q_0 e^{x/l}$ is the heat generation rate constant.

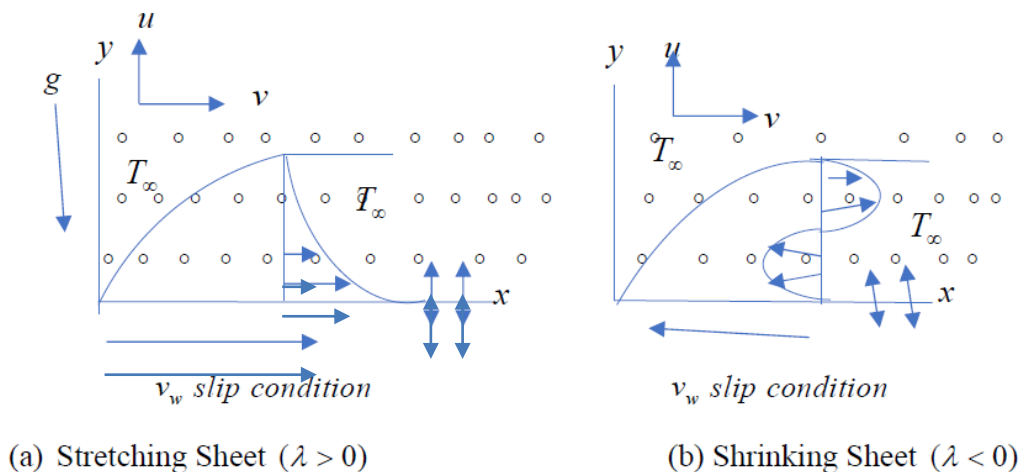


Fig. 1. Physical model

Adopting the stretching/shrinking model (Wahid et al. [15]), convective transport model equations governing boundary layer for continuity, momentum and energy are given as;

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \tag{1}$$

$$u \frac{\partial u}{\partial x} + v \frac{\partial v}{\partial y} = \frac{\mu_{hnf}}{\rho_{hnf}} \frac{\partial^2 u}{\partial y^2} \tag{2}$$

$$(\rho C_p)_{hnf} \left(u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} \right) = k_{hnf} \frac{\partial}{\partial z} \left(1 + m^* (T - T_\infty) \frac{\partial T}{\partial y} \right) - \frac{\partial q_r}{\partial y} - q(T - T_\infty) \tag{3}$$

The appropriate boundary conditions are as follows;

$$u = u_w(x)\lambda + P_1 \frac{\mu_{hnf}}{\rho_{hnf}} \frac{\partial u}{\partial y}, \quad v = v_w, \quad T = T_w(x) + Q_1 \frac{\partial T}{\partial y} \quad \text{at } y = 0 \tag{4}$$

Where P and Q are velocity and thermal slip factors respectively.

The local radiant for the case of an optically thin grey gas is expressed using Rosseland approximation and its formula derived from the diffusion concept of radiative heat transfer as

$$q_r = -\frac{4\sigma^*}{3k} \frac{\partial T^4}{\partial y} \tag{5}$$

where σ the Stefan Boltzmann constant, k the thermal conductivity of the fluid. We assume that the temperature differences within the flow are sufficiently small such that T^4 may be expressed as a linear function of the temperature. This is accomplished by expanding T^4 in Taylor series about T_∞

$$T^4 \cong 4T_\infty^3 T - 3T_\infty^4 \tag{6}$$

and neglecting higher order terms, thus

$$q_r = -\frac{4\sigma^*}{3k_f} \frac{\partial}{\partial y} (4T_\infty^3 T - 3T_\infty^4) \Rightarrow \frac{\partial q_r}{\partial y} = -\frac{16\sigma^* T_\infty^3}{3k_f} \frac{\partial^2 T}{\partial y^2}$$

By using equations (5) and (6), equation (2) reduces to

$$(\rho C_p)_{hnf} \left(\frac{\partial T}{\partial t} + u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} \right) = k_{hnf} \frac{\partial}{\partial y} \left(1 + m^* (T - T_\infty) \frac{\partial T}{\partial y} \right) + \frac{16\sigma^* T_\infty^3}{3k_f} \frac{\partial^2 T}{\partial y^2} \tag{7}$$

Hybrid Nanofluid correlations properties are represented in equation (8) to (11). These are as in (Wahid et al. [15]) and (Weni et al. [43])

$$\rho_{hnf} = \rho_{s1}\phi_{s1} + \rho_{s2}\phi_{s2} + \rho_f (1 - \phi_{hnf}) \tag{8}$$

where $\phi_{hnf} = \phi_{s1} + \phi_{s2}$

$$(\rho C_p)_{hnf} = (\rho C_p)_{s1}\phi_{s1} + (\rho C_p)_{s2}\phi_{s2} + (\rho C_p)_f (1 - \phi_{hnf}) \tag{9}$$

$$\mu_{hnf} = \mu_f (1 - \phi_{hnf})^{-2.5} \tag{10}$$

$$k_{hnf} = k_f \left(\frac{2k_f + \left(\frac{\phi_{s1}k_1 + \phi_{s2}k_2}{\phi_{hnf}} \right) + 2(\phi_{s1}k_1 + \phi_{s2}k_2) - 2\phi_{hnf}k_f}{2k_f - (\phi_{s1}k_1 + \phi_{s2}k_2) + \left(\frac{\phi_{s1}k_1 + \phi_{s2}k_2}{\phi_{hnf}} \right) + \phi_{hnf}k_f} \right) \quad (11)$$

Where ρ_s is the density of the solid nanoparticles, ρ_f is the density of the base fluid, k_s nanoparticles thermal conductivity, k_f base fluid thermal conductivity, ϕ_s nanoparticles volume fraction, and μ_f base fluid dynamic viscosity.

In order to make the fluid flow dimensionless, the following similarity quantities are introduced

$$u = \frac{\partial \psi}{\partial y}, \quad \psi = e^{x/2L} \sqrt{2\nu_f L c} f(\eta, \tau), \quad \eta = ye^{x/2L} \sqrt{\frac{c}{2\nu_f L}}, \quad v = -\frac{\partial \psi}{\partial x} \quad (12)$$

Equation (1)-(3) transformed to non-dimensional form by using the non-dimensional variables equation (12) above to get the similarity solutions (Wahid et al. [15]).

$$B_1 f''' + ff'' - 2f'^2 = 0 \quad (13)$$

$$B_2 \left(\frac{1 - \varepsilon \theta}{Pr} \right) \theta'' + B_3 (f\theta' - f'\theta) + B_2 \left(\frac{\varepsilon(\theta')^2}{Pr} \right) + R\theta'' + \gamma\theta = 0 \quad (14)$$

With boundary conditions as;

$$f(0) = S, \quad f'(0) = \lambda + Pf''(0) \quad \theta(0) = 1 + Q\theta'(0) \quad (15)$$

$$f'(\eta) \rightarrow 0, \quad \theta(\eta) \rightarrow 0, \quad \text{as } \eta \rightarrow \infty$$

Table 1. Thermo-physical properties of water and nano particles

Physical properties	Water	Aluminium oxide	Silver
Density $\rho(kg / m^3)$	997.1	3970	10500
Specific heat $C_p (J / kgK)$	4179	765	235
Thermal conductivity $k(W / mK)$	0.613	40	429

Where η is the similarity variable, Pr is the Prandtl number S is the constant mass flux transfer parameter, where $S > 0$ represents suction while $S < 0$ represents injection of the fluid, ε which represents variable thermal conductivity parameter, R is the radiation parameter, P is the velocity slip parameter and Q is the thermal slip parameter. The dimensionless parameters are defined as follows;

$$B_1 = \left(\frac{\mu_{hnf}}{\rho_{hnf}} / \frac{\mu_f}{\rho_f} \right) \quad B_2 = \left(\frac{k_{hnf}}{k_f} \right) \quad B_3 = \frac{(\rho C_p)_{hnf}}{(\rho C_p)_f} \quad \gamma = 2q_0 L / c(\rho C_p)_f \quad Pr = (\mu C_p)_f / k_f \quad R = \frac{4\sigma T^3}{3k_{hnf}^*} \quad , \quad \varepsilon = m^* (T - T_\infty) \quad (16)$$

The wall skin friction τ_w and heatflux q_w are computed as

$$\tau_{\omega} = \mu_{nf} \left. \frac{\partial u}{\partial y} \right|_{y=0} \quad q_{\omega} = k_{nf} \left. \frac{\partial T}{\partial y} \right|_{y=0} \quad (17)$$

Other physical quantities of engineering and industrial interest include the coefficient of skin friction C_f , and the local Nusselt number Nu is given by

$$C_f = \frac{\tau_{\omega}}{\rho_f U_{\omega}^2} \quad Nu = \frac{xq_{\omega}}{k_f(T_f - T_{\infty})} \quad \text{and} \quad \text{Re}_x^{1/2} C_f = B_1 f''(0) \quad \text{while}$$

$$\text{Re}_x^{-1/2} Nu_x = -B_2 \theta'(0) \quad (18)$$

It is possible to compute dual solutions, which enable the flow stability to be ascertained.

Ignoring continuity equation, the momentum equation and energy equations are rendered time dependant by in cooperating time derivatives in equation (2) and (3);

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = \frac{\mu_{mf}}{\rho_{mf}} \frac{\partial^2 u}{\partial y^2} \quad (19)$$

$$(\rho C_p)_{mf} \left(\frac{\partial T}{\partial t} + u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} \right) = k_{mf} \frac{\partial}{\partial y} \left(1 + m^* (T - T_{\infty}) \frac{\partial T}{\partial y} \right) + \frac{16a^* \sigma T_{\infty}^3}{3k_f} \frac{\partial^2 y}{\partial y^2} - q(T - T_{\infty}) \quad (20)$$

Where t denotes time.

The dimensionless quantities for time dependant variable transformation for equation (19) and (20) are

$$\eta = ye^{x/2L} \sqrt{\frac{c}{2\nu_f L}} \quad \psi = e^{x/2L} \sqrt{2\nu_f Lc} f(\eta, \tau) \quad \theta(\eta, \tau) = \frac{T - T_{\infty}}{T_w - T_{\infty}} \quad \tau = \frac{C}{2L} te^{x/L} \quad (21)$$

Using the above quantities, equation (13) and (14) become

$$B1 \frac{\partial^3 f}{\partial \eta^3} + \frac{\partial^2 f}{\partial \eta^2} f - 2 \left(\frac{\partial f}{\partial \eta} \right)^2 - \frac{\partial^2 f}{\partial \eta \partial \tau} = 0 \quad (22)$$

$$B_2 \left(\frac{1 - \varepsilon \theta}{Pr} \right) \frac{\partial^2 \theta}{\partial \eta^2} + B_3 \left(\frac{\partial \theta}{\partial \eta} f - \frac{\partial f}{\partial \eta} \theta - \frac{\partial \theta}{\partial \tau} \right) + B_2 \varepsilon \left(\frac{\partial \theta}{\partial \eta} \right)^2 + \frac{\partial^2 \theta}{\partial \eta^2} R + \gamma \theta = 0 \quad (23)$$

The correspondent boundary condition for the time dependent flow are;

$$f(0, \tau) = S, \quad \frac{\partial f}{\partial \eta}(0, \tau) = \delta + P \frac{\partial^2 f}{\partial \eta^2}(0, \tau), \quad \theta(0) = 1 + Q \frac{\partial \theta}{\partial \eta}(0, \tau) \quad (24)$$

$$\frac{\partial f}{\partial \eta}(\eta, \tau) \rightarrow 0, \quad \theta(\eta, \tau) \rightarrow 0 \quad \text{as } \eta \rightarrow \infty$$

The perturbation equation is introduced for stability analysis of the similarity assumed solutions, $f(\eta) = f_0(\eta)$ and $\theta(\eta) = \theta_0(\eta)$

$$f(\eta, \tau) = f_0(\eta) + F(\eta)e^{-\Omega\tau} \quad (25)$$

$$\theta(\eta, \tau) = \theta_0(\eta) + G(\eta)e^{-\Omega\tau}$$

Where Ω is undetermined eigenvalue, consequently values of $F(\eta)$ and $G(\eta)$ are relatively small compared to $f_0(\eta)$ and $\theta_0(\eta)$ respectively.

Substituting equation (25) into equation (22)-(24) and also render value of τ to zero, the initial decay or growth of of disturbance in equation (25) can be traced and the linearized equations are obtained as;

$$B_1 F''' + f_0'' F + F'' f_0' - 4F' f_0' + \Omega F' = 0 \tag{26}$$

$$B_2 \left(\frac{1 - \varepsilon G}{Pr} \right) G'' + B_3 (f_0 G' + F \theta_0' - f_0' G - F' \theta_0 - \Omega G) + 2B_2 \varepsilon G' \theta_0' + R G'' + \Omega G = 0 \tag{27}$$

And the corresponding linearized boundary conditions;

$$F(0) = 0, \quad F'(0) = PF''(0), \quad G(0) = QG'(0) \tag{28}$$

$$F'(\infty) \rightarrow 0 \text{ and } G'(\infty) \rightarrow 0$$

The above linearized boundary conditions equation (28) are equated to zero. It is important to relax $F'(\infty) \rightarrow 0$ and be replaced with $F'(0) = 1$ to produce realizable and stable eigenvalues.

Table 2. Validation of the present solutions of $f''(0)$ and $-\theta'(0)$ for $S = 3$, $Pr = 0.7$, $\varepsilon = 0$, $R = 0$, and $P = Q = 0$

	$f''(0)$		$-\theta'(0)$	
	First Solution	Second Solution	First Solution	Second Solution
Hafidzuddin et al. [44]	2.3908	-0.9722	1.7712	0.8432
Waini et al. [43]	2.390814	-0.972247	1.771237	0.848316
Wahid et al. [15]	2.390813	-0.972129	1.771237	0.847748
Present Result	2.390813634	-0.97212884	1.771237309	0.847748178

3. RESULTS AND DISCUSSION

The result of the combined effects of the solution of the equation (13) and (14) under condition in equation (15) are obtained using bvp4c solver in MATLAB software. The single phase nanofluid flow model under investigation is a hybrid nanoparticles aluminium oxide and silver with water base fluid, the effective prandtl number of working nanofluid is that of pure water (i.e $Pr = 0.62$) (Yashkun et al., 2020).

The stretching as indicated in equation (15) is where ($\lambda > 0$) while shrinking is ($\lambda < 0$) . Radiative heat flux, variable thermal conductivity, velocity slip parameter, thermal slip parameter, and nano volume fraction for silver are varied in order to study their impacts on the flow. Prantln number and aluminium nano volume fraction are specified fixed throughout the study as $Pr = 0.62$ and $\phi_1 = 0.01$.

The temperature profile $\theta(\eta)$ for varied values of variable thermal conductivity parameter (ε) is

indicated in Fig. 2. The result indicated that upsurge in variable thermal conductivity parameter generates increase in temperature for second solution, but decrease in first solution. It indicates that in a shrinking region heat absorption take place with increase in value of variable thermal conductivity parameter. Fig. 3 indicates the influence of radiative flux on temperature profile $\theta(\eta)$, as expected it is noticed that increase in radiative parameter attracts increase in temperature of the fluid. This shows that presence of nano volume fraction in the fluid does not affect the influence of radiation on increasing fluid temperature at the shrinking region.

Figs. 4 and 5 depict the velocity profiles $f'(\eta)$ for silver volume fraction $\phi_2 = (0.01, 0.005, 0.001)$ and velocity slip parameter $P = (0.2, 0.4, 0.6)$. It is noticed in Fig. 4 reveals that as the volume fraction of nano particle decreases, the first solution indicates that velocity upsurge, in the second solution the velocity decrease. Physically it means that decrease in the size of nano particle result in decrease in the flow resistance

thereby allowing more fluid flow. In Fig. 5, portrays the increment in P parameter which attributes to more fluid flow in the first solution and resistance to the flow in the second solution. Slip parameter stimulates boundary layer of the plate and allow more fluid to flow, that what it is in the first solution and second solution demonstrates opposite trend.

The effects of skin friction coefficient $Re_x^{1/2} C_f$ on velocity slip parameter P is plotted against shrinking/stretching parameter λ as depicted in Fig. 6. Bifurcation of boundary layer shift slightly with increase in P at a certain point in shrinking region where ($\lambda = -2.0783$), ($\lambda = -1.7652$) and ($\lambda = -1.4662$) in the first solution and the trend changes gradually toward stretching region ($\lambda > 0$).

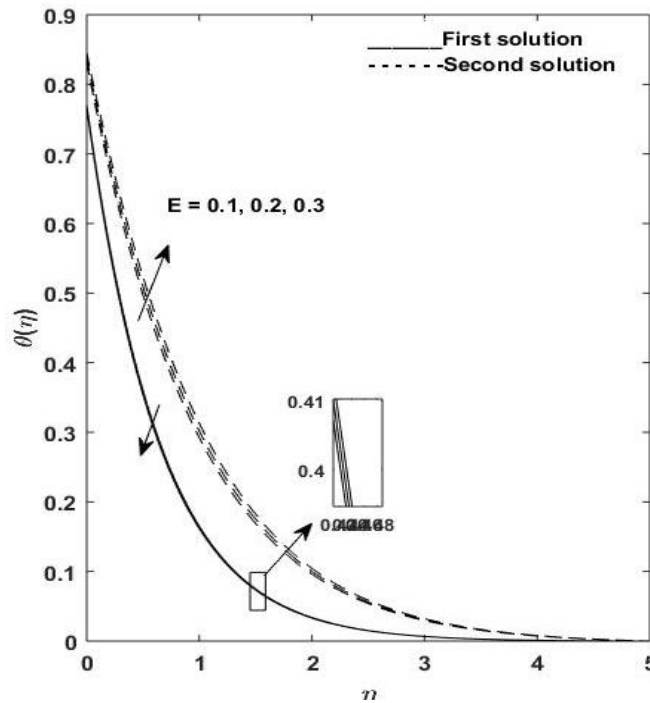


Fig. 2. Dual solution for temperature profile variable thermal conductivity parameter (ϵ)

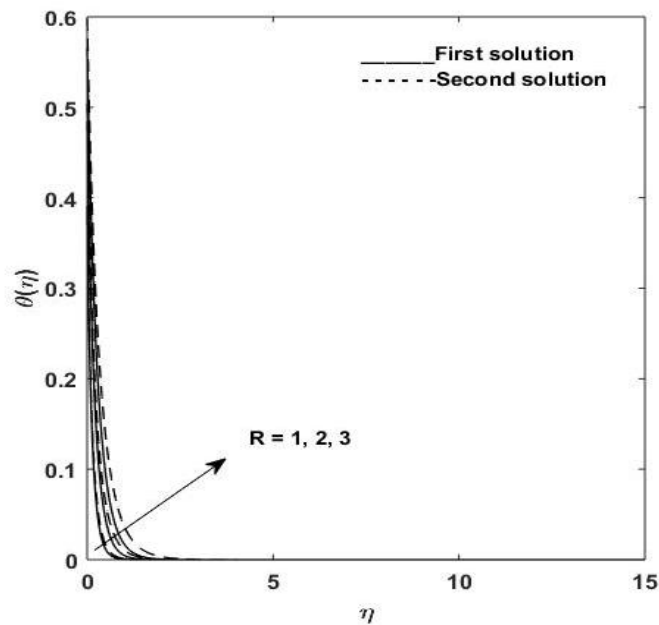


Fig. 3. Dual solution of temperature profile for radiative heat flux (R)

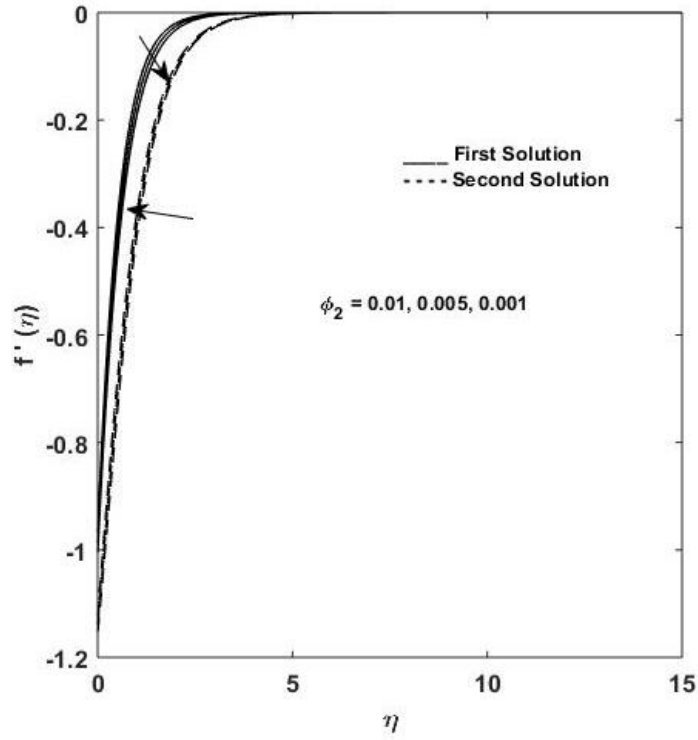


Fig. 4. Dual solution of velocity profile ϕ_2

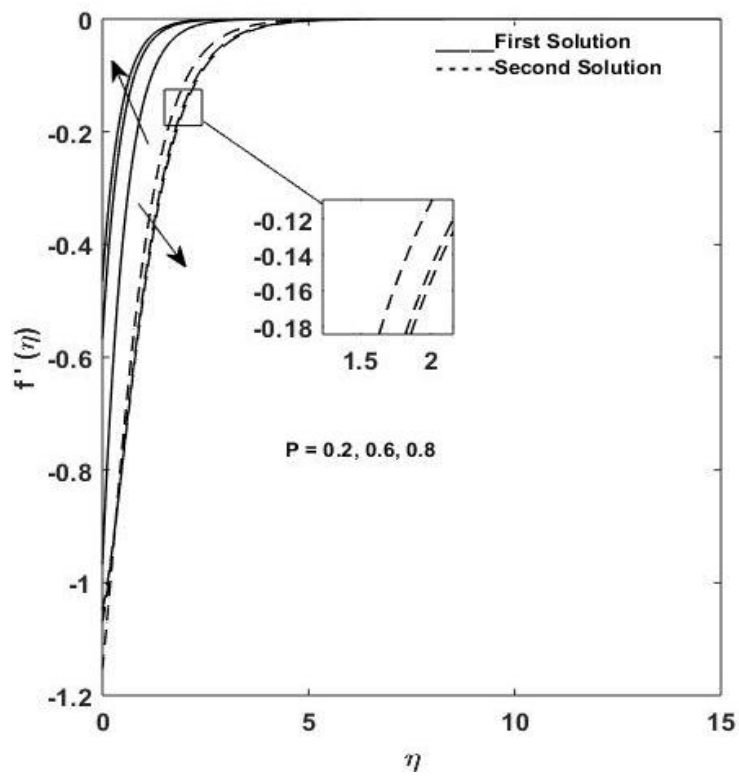


Fig. 5. Dual solution of velocity slip parameter (P)

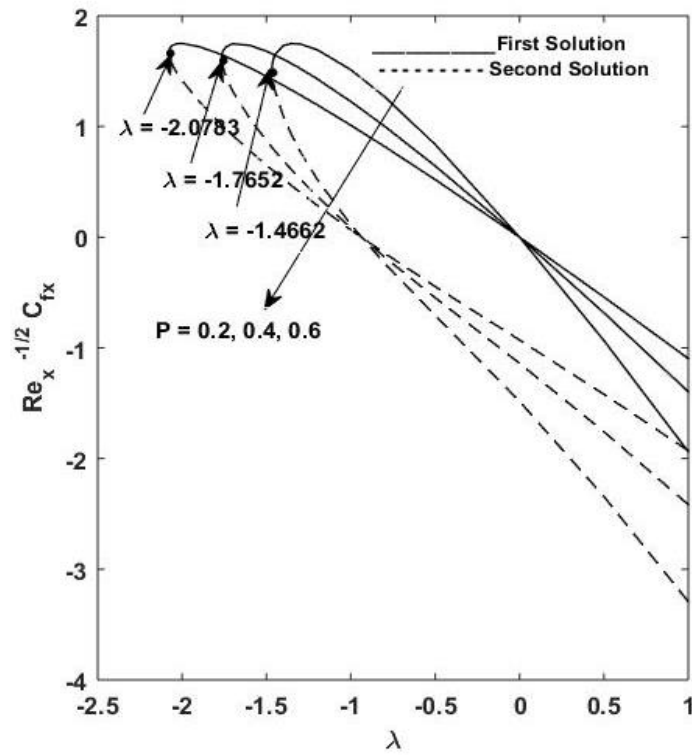


Fig. 6. Local Skin friction on λ for varied values of P

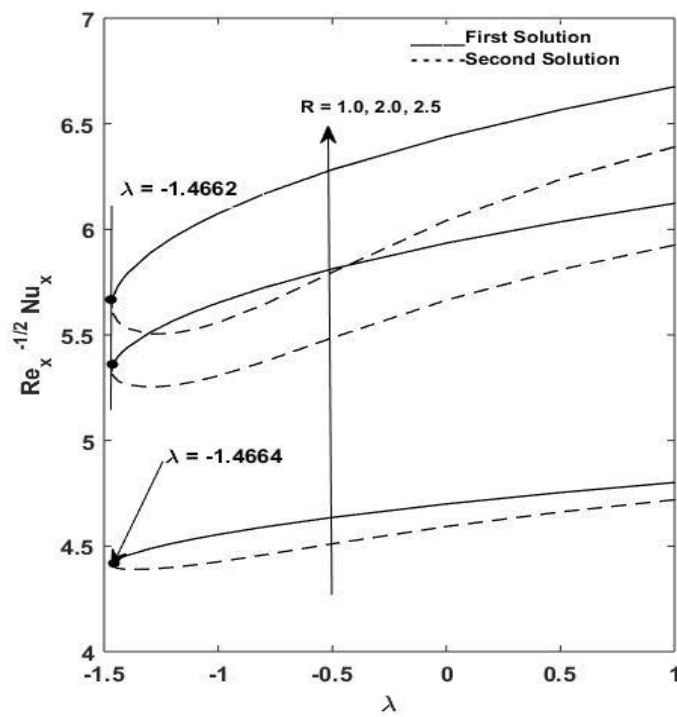


Fig. 7. Local Nusselt's number on λ with varied R

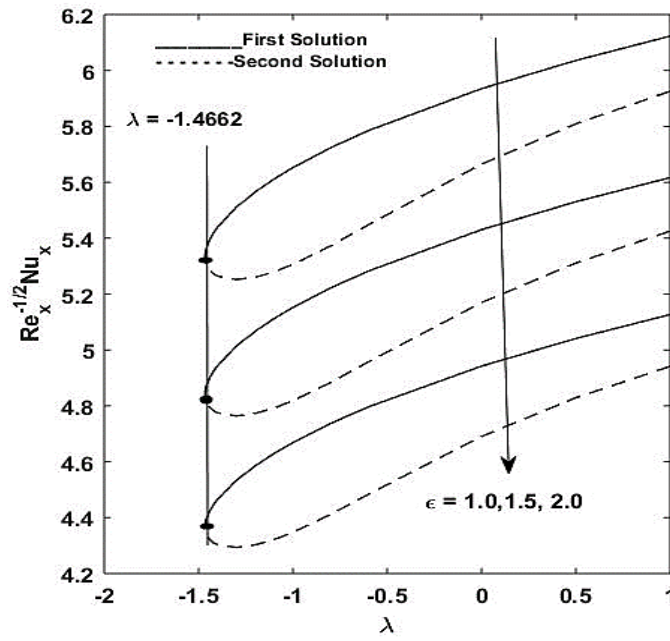


Fig. 8. Local Nusselt's number on λ for varied values of ϵ

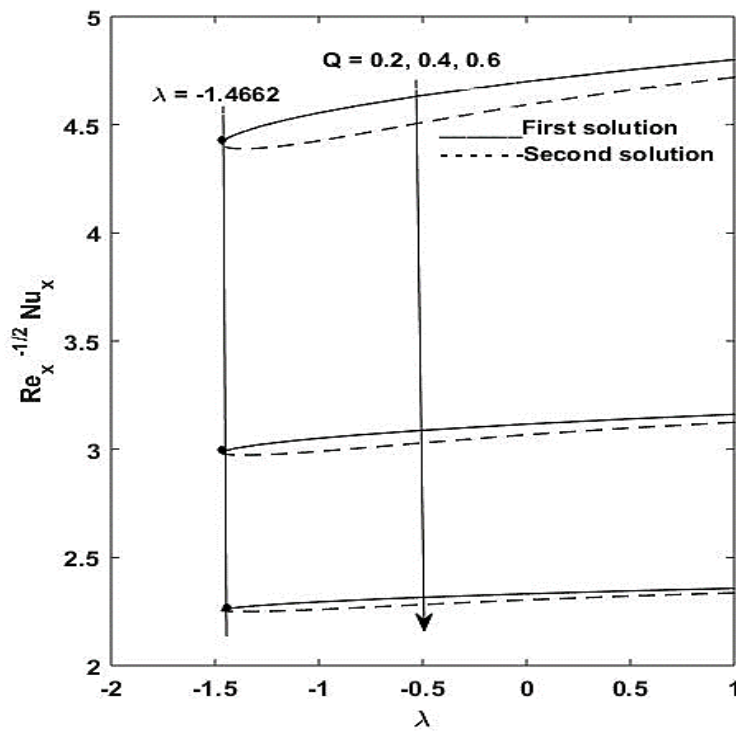


Fig. 9. Local Nusselt's number on λ for varied values of Q

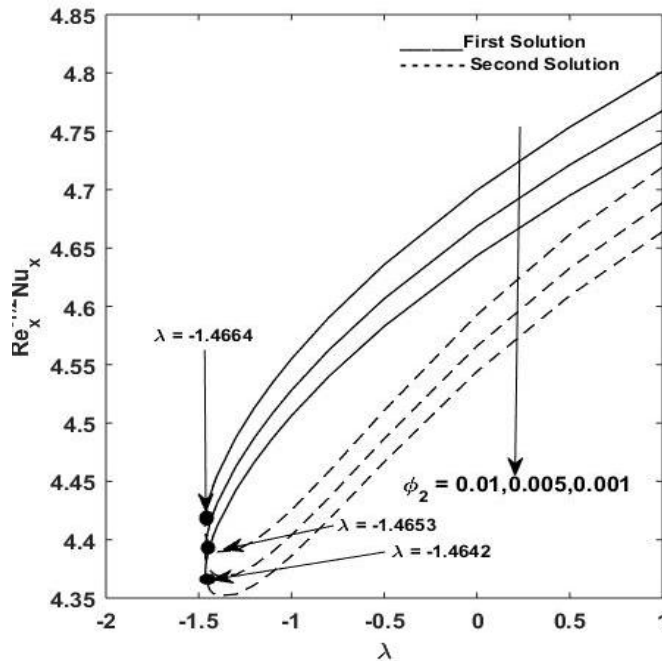


Fig. 10. Local Nusselt's number on λ for varied values of ϕ_2

The upsurge in radiation parameter R leads to increase in rate of heat transfer $Re_x^{-1/2} Nu_x$. Bifurcation point remain constant ($\lambda = -1.4662$) when $R = 1.0, 2.0, 2.5$, this is demonstrated in Fig. 7. Physically it means that the heat generated by R caused the local Nusselt number $Re_x^{-1/2} Nu_x$ increased and bifurcation remains in shrinking region ($\lambda < 0$).

Figs. 8 and 9, the impact of different values of the involving parameters on the local Nusselt number $Re_x^{-1/2} Nu_x$ for shrinking/stretching parameter λ are presented. It is noticed in Fig. 8 that increase in variable thermal conductivity parameter reduces the local Nusselt number in both first and second solution. Concurrently the local Nusselt number is also noted to drastically reduce as value of thermal slip parameter (Q) increases. The critical point for both the plots remain in shrinking region. Physically it means that rate of heat transfer can be reduced by increasing thermal slip parameter.

For silver volume fraction $\phi_2 = (0.01, 0.005, 0.001)$ as reported in Fig. 10, the increase in silver volume fraction parameter amplifies the local Nusselt number $Re_x^{-1/2} Nu_x$. Physically it shows that the rate of heat transfer in the fluid is

raised with upsurge in size of silver nano particles.

4. CONCLUSION

Hybrid nanofluid slip flow over a permeable sheet with radiative heat flux, variable thermal conductivity and heat source. The governing equations in partial differential equations of momentum and energy were converted into non dimensional ordinary differential equations using similarity transformations and solve numerically using MATLAB bvp4c solver. The conclusion is arrived with after analysis of the results as follows;

- i) It indicates that on shrinking region heat absorption take place with increase in value of variable thermal conductivity parameter (\mathcal{E}).
- ii) It is noticed that increase in radiative parameter attracts increase in temperature of the fluid at the shrinking region.
- iii) The velocity of the fluid is appreciated with increase in silver volume fraction (ϕ_2) and depreciates with increase in velocity slip parameter (P)
- iv) Increase in velocity slip parameter decreases the local skin friction (P) and

local Nusselt number is appreciated by increasing radiation parameter (R).

- v) Heat absorption is noticed with increase in variable thermal conductivity, silver volume fraction (ϕ_2) and heat source/sink parameter (Q).

DISCLAIMER (ARTIFICIAL INTELLIGENCE)

Author(s) hereby declare that NO generative AI technologies such as Large Language Models (ChatGPT, COPILOT, etc) and text-to-image generators have been used during writing or editing of manuscripts.

ACKNOWLEDGEMENT

The authors profoundly acknowledge the support received from Tertiary Education Trust Fund (TETFund), through Kebbi State Polytechnic Dakingari (Nigeria) for funding the research under Institutional Based Research (IBR). (2023RF).

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Wen D, Ding Y. Experimental investigation into convective heat transfer of a nanofluid at the entrance region under laminar flow conditions. *International Journal of Heat and Mass Transfer*. 2004;47:5181-5188.
2. Roy G, Palm SJ, Nguyen CT. Heat transfer and fluid flow of a nanofluid in laminar radial flow cooling system. *Journal of Thermal Science*. 2004;14(4):362-367.
3. Devi ASP, Andrews J. Laminar boundary layer flow of nanofluid over a flat plate. *International Journal of Applied Mathematics and Mechanics*. 2011;7(6):52-71.
4. Hamad MAA. Analytical solution of natural convection flow of a nanofluid over a linearly stretching sheet in the presence of magnetic field. *International Communication in Heat and Mass Transfer*. 2011;38(4):487-492. Available: [Dx.doi.org/10.1016/j.icheatmasstransfer.2010.12.042](https://doi.org/10.1016/j.icheatmasstransfer.2010.12.042).
5. Maripola S, Kishan N. MHD nanofluid radiating stretching sheet with chemical reaction and heat source/sink. *International Journal of Innovation Research in Science, Engineering and Technology*. 2017;6(2):15999-16007.
6. Ebiwareme L, Esekhaigbe E, Bunonyo KW, Uka UA. Magnetohydrodynamic nonlinear radiative heat and mass transfer flow of sisko nanofluid through a nonlinear stretching sheet in the presence of chemical reaction. *J. Adv. Math. Com. Sci*. 2023 Dec. 8 [cited 2024 Jun. 5];38(11):72-86. Available: <https://journaljamcs.com/index.php/JAMCS/article/view/1846>
7. Chaudhari KS, Walke PV, Wankhede US, Shelke RS. An Experimental investigation of a nanofluid (Al₂O₃+H₂O) based parabolic trough solar collectors. *Curr. J. Appl. Sci. Technol.* [Internet]. 2015 Jun. 5 [cited 2024 Jun. 5];9(6):551-7. Available: <https://journalcjust.com/index.php/CJAST/article/view/243>
8. Sheikholeslami M, Rokni HB. Simulation of nanofluid heat transfer in presence of magnetic field: a review. *International Journal of Heat and Mass Transfer*. 2017 Dec 1;115:1203-33.
9. Yu W, France DM, Routbort JL, Choi SU. Review and comparison of nanofluid thermal conductivity and heat transfer enhancements. *Heat transfer engineering*. 2008 May 1;29(5):432-60.
10. Aly EH, Pop I. MHD flow and heat transfer over a permeable Stretching /shrinking sheet in a hybrid nanofluid with a convective boundary condition. *HFF*. 2019;30:12-3038.
11. Lund LA, Omar Z, Khan I, Sherif ESM. Dual solutions and stability analysis of a hybrid nanofluid over a stretching/shrinking sheet executing MHD flow. *Symmetry*. 2020;12:276.
12. Zainal AN, Nazar R, Nayanthrun K, Pop I. Stability analysis of MHD hybrid nanofluid flow over a stretching/shrinking sheet with quadratic velocity. *Alexandria Engineering Journal*; 2020. Available: <https://doi.org/10.1016/j.aej.2020.10.020>
13. Xuan Y, Roetzel W. Conceptions for heat transfer correlation of nanofluids. *International Journal of Heat and Mass Transfer*. 2000;43:3701-3707.
14. Huang CJ, Yih KU. Non-Linear radiation and variable viscosity effects on free convection of a power-law nanofluid over a truncated cone in a porous media with zero nanoparticles flux and internal heat

- generation. *Journal of Thermal Science and Engineering Applications*. 2021; 13/031020-1
15. Wahid NS, Arifin NM, Khashi'ie NS, Pop I. Hybrid nanofluid slip flow over an exponentially stretching/shrinking permeable sheet with heat generation. *Mathematics*. 2021;9: 30. Available:dx.doi.org/10.3390/math9010030.
 16. Gangadha K, Kakshmi BK, El-Sapa S, Subbarae MV, Chamkha AJ. Thermal energy transport of radioactive nanofluid flow submerged with microorganisms with zero mass flux condition. *Waves in Random and Complex Media*; 2022. Available:https://doi.org/10.1080/17455030.2022.2072536.
 17. Iyahrja S, Rajadurai SJ, Sivakumar M, Lenin N. Investigation on silver-water nanofluid for development of new viscosity correlation. *Bull. Chem. Ethiop*. 2022; 37(2):505-514
 18. Rajesh V, Sheremet M. Natural convection of ternary nanofluid in a differential heated enclosure with non-uniform heating wall. *Micromachnics*. 2023;14:1049. Available:https://doi.org/10.3390/mi14051049.
 19. Nabwey HA, Armaghani T, Azizimehr B, Rashad AM, Chamkha AJ. Comprehensive review of nanofluid heat transfer in porous medium. *Nanomaterials*. 2023;13:937 Available:https://doi.org/10.3390/nano13050937.
 20. Rahaman MM, Bhowmick S, Modal RN, Saha CS. A computational study of chaotic flow and heat transfer within a trapezoidal cavity. *Energies*. 2023;16(13):5031 Available:https://doi.org/10.3390/en16135031.
 21. Patel HE, Sundararajan T, Paradeep T, Dasgupta A, Dasgupta N, Das SK. A micro-convection model for thermal conductivity for nanofluids. *Paramana Journal of Physics*. 2005;65(5):863-869. DOI: org/10.1007/bf02704086
 22. Gajjela N, Garvandha M. Impacts of variable thermal conductivity and mixed convective stagnation point flow in a couple stress nanofluid with viscous heating and heat source. *Heat Transfer*. 2020; 49(6):3630-3650. Available:https://doi.org/10.1002/htj.21792.
 23. Othman MN, Jedi A, Bukar NAA. MHD flow and heat transfer of hybrid nanofluid over an exponentially shrinking surface with heat source/sink. *Appl. Sci*. 2021;11:8199. DOI:org/10.3390/app11178199.
 24. Tarakaramu N, Narayana PVS, Venkateswarlu B. Numerical simulation of variable thermal conductivity on 3D flow of nanofluid over a stretching sheet. *Nonlinear Engineering*. 2020;9(1):233-243.
 25. Abbas W, Ibrahim AM, Mokhtar O, Megahed AM, Said AAM. Numerical analysis of MHD nanofluid flow characteristics with heat and mass transfer over a vertical cone subjected to thermal radiations and chemical reaction. *Journal of Nonlinear Mathematical Physics*; 2023. DOI:org/10.1007/s44198-023-00142-4
 26. Rao IJ, Rajagopal KR. The effects of the slip boundary condition on the flow of fluid in a channel. *Acta Mechanica*. 1999;135: 113- 126.
 27. Mukhopadhyay S. Slip effects on MHD boundary layer flow over an exponentially stretching sheet with suction/blowing and thermal radiation. *Ain Shams Engineering Journal*. 2013;4(3):485-491
 28. Reda G, Abdel R. MHD slip flow on Newtonian fluid past a stretching sheet with thermal convection boundary condition, radiation and chemical reaction. *Hindawi Publishing Cooperation, Mathematical Problems in Engineering*. 2013;1-12. Article ID 359817.
 29. Sher-Akbar M, Nadeem S, UI-Haq R, Khan ZH. Radiation effects on MHD stagnation point flow of nanofluid towards stretching surface with convective boundary condition. *Chinese Journal of Aeronautics*. 2013;26(6):1389-1397.
 30. Rashid MW, Ganesh NV, Abdul-Hakim AK, Gangi B. Buoyancy effects on MHD flow of nanofluid over a stretching sheet in the presence of thermal radiation. *Journal of Molecular Liquids*. 2014;198: 234-238.
 31. Hayat T, Imtiaz M, Alsaed A, Kutbi MA. MHD three dimensional flow of nanofluid with velocity slip and non-linear thermal radiation. *Journal of Magnetism and Magnetic Materials*. 2015;396:31-37.
 32. Daniel Y. Presence of heat generation/absorption on boundary layer slip flow of nanofluid over a porous stretching sheet. *American Journal of Heat and mass transfer*. 2015;2(1):15-30. Available:https://dx.doi.org/10.7726/ajhmt.2015.100

33. Doganchi A, Ganji DD. Thermal radiation effects on the nanofluid buoyancy flow and heat transfer over a stretching sheet considering Brownian motion. *Journal di Molecular Liquids*. 2016; 223:521- 527.
34. Yashkun U, Nor HZ, Abubakar A, Shok A, Pop I. MHD hybrid nanofluid flow over a permeable stretching/shrinking sheet with thermal radiation effects. *International Journal for Numerical methods for Heat and Fluid Flow*. 2020;0961-5539. DOI:10.1108/HFF-02-2020-0083
35. Jaafar A, Waini I, Jamaludin A, Nazar R, Pop I. MHD flow and heat transfer of a hybrid nanofluid past a nonlinear surface stretching/shrinking with effects of thermal radiation and suction. *Chinese Journal of Physics*. 2022;79(2022):13-27.
36. Vishalakshi AB, Mahesh R, Mahabaleshwar US, Rao AK, Perez LM, Lorez D. MHD hybrid nanofluid flow over a stretching/shrinking sheet with skin friction: Effects of radiation and mass transpiration. *Magnetochemistry*. 2023;9118. DOI:org/10.3390/magnetochemistry9050118
37. Imran U, Sharidan S Ilyas K. Effects of slip condition and Newtonian heating on MHD fluid over a non-linearly stretching sheet saturated in a porous medium. *Journal of King of Saudi University Science*. 2016; 29(2):1-10.
38. Arabpour A, Karimipour A, Tagraic D, Akabari OA. Investigation into the effects of slip boundary condition on nanofluid flow in a double layer microchannel. *Journal of Thermal Anal Colarim*. 2018;131:2975-2991. DOI:org/10.1007/s10973-01-6813-3
39. Shafiq GR, Khalique CM. Significance of thermal slip and convective boundary conditions in three dimension rotating Darcy-Forchheimer nanofluid flow. *Symmetry*. 2020;12(5):741. DOI.org/10.3390/sym12050741.
40. Ahmed A, Sarki MN. Slip condition effects on unsteady MHD fluid flow with radiative heat flux over a porous medium. *Advances in Pure Mathematics*. 2023;13:153-166. Available: <https://doi.org/10.4236/apm.2023.133008>.
41. Duguma KA, Makinde OD, Eyadene GL. Dual solution and stability analysis of Cu-H₂O-Casson nanofluid convection past a heated stretching/shrinking slippery sheet in a porous medium. *Hindawi Computational and Mathematical Method*, 2023;6671523:20. Available:Hppts://doi.org/10.1155/2023/6671523.
42. Taghreed AH, Mahdy A. Variable thermal conductivity and thermophoric aspects of free convection flow of a macropolar fluid due to permeable cone: heat source/sink. *AIP Advances*. 2022;12:095308.
43. Waini I, Ishak A, Pop I. Hybrid nanofluid flow induced by an exponentially shrinking sheet. *Chinese Journal of Physics*; 2019.
44. Hafidzuddin MEH, Nazar R, Arifin NM, Pop I. Boundary layer flow and heat transfer over a permeable exponentially stretching/shrinking sheet with generalized slip velocity. *JAFM*, 2016;9:2025-2036.

© Copyright (2024): Author(s). The licensee is the journal publisher. This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:
<https://www.sdiarticle5.com/review-history/118682>